


T Ground Level Loading Scissor Lifts

Simplify Load Placement and Removal

Use any Hand Pallet Jack, Cart, or Hand Truck

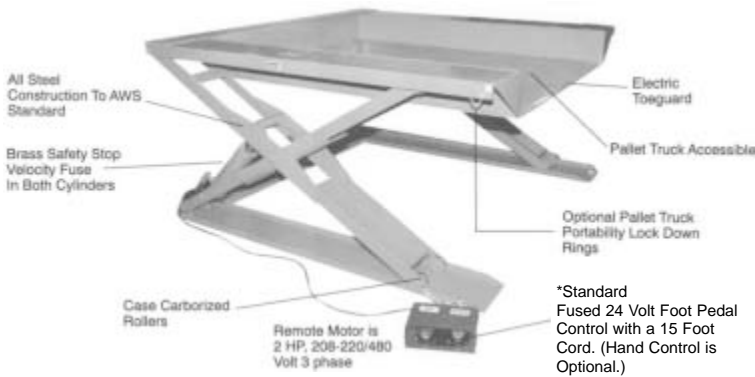

The Ground Lift is ergonomically designed for easy loading and placing materials at the proper working height.



| Series | Platform Size (Inches) | | Capacity (Thousands) | Platform Raised Height (Inches) |
|--------|------------------------|--------|----------------------|---------------------------------|
| EHLTG | Width | Length | | |

MODEL NUMBER FORMAT EHLTG - Width - Length - Capacity - Platform Raised Hgt. Platform Size (Inches) (Thousands) (Inches)

Some Custom Sizes Available in this Design Call **T. Ted Thorsen** for Details and Pricing.

| Platform Size | Capacity (Lbs.) | Lowered Hgt. Range | Raised Height | Overall Size | Price | Weight | Platform Size | Capacity (Lbs.) | Lowered Hgt. Range | Raised Height | Overall Size | Price | Weight |
|---------------|-----------------|--------------------|---------------|-----------------------------|-----------|--------|---------------|-----------------|--------------------|---------------|--------------|-----------------------------|----------|
| 44"W x 50"L | 2000 | 1/2" | 36" | 66"W x 56"L | \$3636.00 | 1350# | 44"W x 70"L | 2000 | 1/2" | 48" | 66"W x 78"L | \$3914.00 | 1900# |
| 44"W x 50"L | 4000 | 1/2" | 36" | 66"W x 56"L | 4336.00 | 1610# | 44"W x 70"L | 4000 | 1/2" | 48" | 66"W x 78"L | 4815.00 | 2200# |
| | | | | Optional Accordion Skirting | \$589.00 | | | | | | | Optional Accordion Skirting | \$877.00 |
| 52"W x 50"L | 2000 | 1/2" | 36" | 74"W x 56"L | 3714.00 | 1500# | 52"W x 70"L | 2000 | 1/2" | 48" | 74"W x 78"L | 4003.00 | 2100# |
| 52"W x 50"L | 4000 | 1/2" | 36" | 74"W x 56"L | 4488.00 | 1800# | 52"W x 70"L | 4000 | 1/2" | 48" | 74"W x 78"L | 4903.00 | 2400# |
| | | | | Optional Accordion Skirting | \$612.00 | | | | | | | Optional Accordion Skirting | \$927.00 |

EHLTG-WB Optional Warning Beeper \$241.00

Foot Control is standard. Hand Control is optional.

Has the Right Scissor Lift to Fit Your Ergonomic Job Improvement Needs

Call T.T. with your requirement and we will respond promptly with sizes, capacities, options and prices.

Powerful productivity

Any job that requires a worker to lift, feed, unload, sort or position can benefit from a Rol-Lift table.

Less fatigue equals greater safety

Ergonomic medical studies show that even minor fatigue lowers productivity and increases the risk of injury.

Built like a tank, but handles like a dream

Rol-Lift gives you what some others make you pay for. Below are just a few of the standard features you'll find on all Rol-Lift tables. Rol-lift calls them "quality" others call them options.



Upper Travel Limit Switch - Can be set to stop the table automatically at the precise level desired.




Velocity Fuse - Protects against a load falling due to a hydraulic line failure. One per cylinder.



Adjustable Flow Control - Regulates the tables down speed for added safety.



Up/Down Push-button - NEMA 4X rated control protects against splashing, falling and hose directed water.

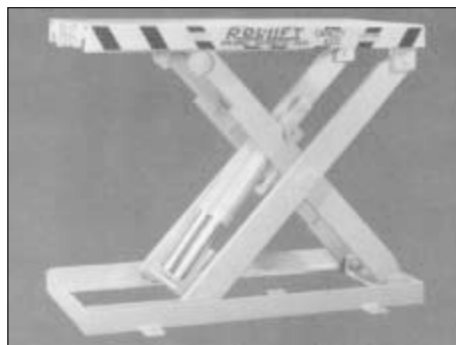

SLS Series Scissor Lift Standard - Available in standard capacities to 10,000 lbs., travel to 59" and platform sizes as large as 48" x 108". If you don't see the size or design you need, call T.T. We will quote modified units to your exact specification including power choices.



HTP Series

Hydraulic Tilt Platforms - The HTP is available with standard 45° tilt, capacities to 6,000 lbs., and platform sizes as large as 48" x 60".



LDF Series

Level Dock Loader - Available in standard capacities to 12,000 lbs. and platform sizes to 96" x 144".



SLP Series

Scissor Lift Pit-Mount - With standard specifications similar to the SLS series, the SLP is designed for those applications where mounting flush or below the floor is required.



With capacities to 5,000 lbs., the MHL is the perfect mobile solution for loading and unloading trucks without a permanent dock facility.



SLT Series

Scissor Lift and Tilt - Designed for applications where both lifting and tilting are required. The SLT is available with a standard 45° tilt, capacities to 6,000 lbs., travel to 48" and platform sizes as large as 48" x 72".



An SLT equipped with a turntable provides easy access to all sides of any size product. Preset detents are available.



MHL Series

Mobile Hydraulic Lift - These units require no installation and can be used inside or out. Capacities to 5,000 lbs. and platforms as large as 6' x 8'.



Feeding operations are easier and faster when a Rol-Lift scissor table is used to move the material to a comfortable level.

Maintenance Lifts, Platforms, and Elevating Devices

Meets/exceeds ANSI safety standards.

Compliance with unspecified codes should not be assumed.

MRO Maintenance Lifts

For two workers at working heights to 34"

Four standard models.

Available with AC or DC electric- hydraulic drive: 12V motor with thermal overload and 25' power cord; 12V DC system with two long-life batteries and trickle-type charger.

Large 36" x 28" decks hold two workers, have 42" guardrails, midrails and toeboards. Base equipped with four adjustable jacks, 8" casters.

With telescoping sections lowered and rails folded, MROs pass through 7-ft high doorways. Rated at 500-lb. capacity.



| Working Height | Platform Height | | Specify Model Number | | Price |
|----------------|-----------------|-------|----------------------|--------|------------|
| | Max. | Min.† | Model | Weight | |
| 21' | 15' | 6'4" | MR-15-AC | 800 | \$5,495.00 |
| | | | MR-14-DC | 930 | \$5,679.00 |
| 215 | 19'3" | 6'4" | MR-20-AC | 1000 | \$6,798.00 |
| | | | MR-20-DC | 1130 | \$6,967.00 |
| 30' | 23'8" | 6'7" | MR-24-AC | 1200 | \$8,258.00 |
| | | | MR-24-DC | 1330 | \$8,427.00 |
| 34' | 28' | 6'10" | MR-28-AC | 1420 | \$9,554.00 |
| | | | MR-28-DC | 1550 | \$9,723.00 |

† To determine vertical storage height, add 2" to minimum platform height. NOTE: All platform-deck dimensions are 36" x 28". All base dimensions are 28" x 6'3" without jacks. (With jacks in storage position, dimensions are 29" x 6'11". With jacks extended, base dimensions are 6'4" x 6'3").


Single/Lifts

For one worker at working height to 21'

Hydraulic systems have dual action hand pump. Optional 120V AC and 12V DC drives available.

Enclosed deck has 42" high guardrails, midrail, gate and toeboards. Base equipped with four leveling jacks, 6" casters.

Fully-lowered, Single/Lifts fit through standard size door openings. Rated at 300lb capacity.



| Working Height | Platform Height | | Platform Size | | Specify Model Number | Weight (lbs) | Price |
|------------------------------|-----------------|------|---------------|-----|----------------------|--------------|------------|
| | Max. | Min. | L | W | | | |
| 21' | 15' | 6'4" | 20" | 28" | BL-315* | 590 | \$2,453.00 |
| Cantilevered Platform | | | | | | | |
| 20' | 14' | 6'4" | 64" | 21" | BL-C14** | 900 | \$3,221.00 |

*Base is 65" long by 32" wide. With outriggers extended, each unit's base is 65" x 68". ** Cantilevered aluminum platform extends 34" beyond base.

Ground Entry Order Picker

- Rated capacity: 300 lbs./one person.
- Totally enclosed 26" x 28" platform with 42" guardrails, midrails and gate; 4" toeboards and skid-resistant deck.
- Welded compact base frame with 6" casters (2 are locking swivel casters) for easy rolling and maneuverability.
- Standard finish is chip-resistant gray enamel paint.
- 12 Volt DC power (for raising and lowering) includes battery and charger; 80 to 100 raise and lower cycles between charges on a normal 8-hour shift.
- Raised deck heights: Ground Entry - 9'6"; One Step Entry 10'6".
- Built-in storage shelves:
Ground Entry Model: OP-10; Two 24" x 24" shelves;
One Step Entry Model: OP-11; Two 18" x 24" shelves
- One Step Entry unit includes a 20" x 28" shelf that raises and lowers with the platform.
- Compact design for doorway passage and easy storage.



Options/Accessories for Order Picker and Lifts

| | |
|---|-----------|
| AC electric 120V/60Hz/1phase motor with thermal overload, motor with thermal overload, 25' cord | \$1784.00 |
| DC electric 12V system with battery charger | \$1374.00 |
| Shop air/hydraulic* | \$2189.00 |
| Tool tray | \$77.00 |
| Flourescent tube holder | \$139.00 |
| Platform duplex receptacle 115V | \$244.00 |

* For satisfactory performance, air requirements are 90 CFM with 90 PSI pressure

Hydraulic -Powered Elevating Platforms

These high-performance, low maintenance work platforms are equipped with hydraulic systems and are available with AC, DC or air-motor drives. The standard drive is a fully grounded 120V electric motor and 25' of three-wire cable with grounded plug.

Every platform is all-welded, unitized construction, with four 8" swivel casters with combined wheel and swivel locks, built-in access to lowered platform, and 1000-lb lifting/holding capacity. Large 3' x 8' platform with serrated grating deck. Cantilever platform optional.



| Working Height | Platform Max. | Height Min. | Stabilizers | Specify Model No. | Weight (lbs.) | Price/ea. |
|----------------|---------------|-------------|-------------|-------------------|---------------|------------|
| 13' | 7'4" | 2'4" | | HW1-7 | 1700 | \$7,497.00 |
| 16' | 10'1" | 3' | Not | HW1-10 | 1800 | 7,995.00 |
| 19' | 12'10" | 3' | Required | HW2-13 | 2000 | 8,521.00 |
| 21' | 15'8" | 5'8" | | HW2-16 | 2100 | 9,355.00 |
| 24' | 18'8" | 3'7" | Standard | HW3-19* | 2300 | 11,142.00 |
| 27' | 21'4" | 6'4" | Equipment | HW3-22* | 2300 | 11,862.00 |
| 30' | 24'4" | 4'1" | | HW4-24 | 2700 | 12,587.00 |
| 33' | 27' | 6'8" | | HW4-27** | 2800 | 13,393.00 |

NOTE: All base dimensions are 9 by 4 ft.

* Add 20" to 4-foot base width for extended stabilizers

** Add 40" to 4-foot base width for extended stabilizers

Tank-Top Lift

Access to tank truck and railroad car hatches, or other applications requiring cantilevered work decks, is easy with Ballymoore's all-welded rugged steel Tank-Top lifts. Flat steps provide access to the 9' high landing; a telescoping ladder with slip-resistant rungs provides access to the 4' long by 2' wide cantilevered deck at raised heights. Deck height is hydraulically adjustable from 9' to 13' underclearance.

Tank-Top Lift

| Deck Height Above Fork | Capacity (lbs.) | Specify Model Number | Wt. (lbs.) | Price |
|------------------------|-----------------|----------------------|------------|------------|
| Adjustable 9' to 13' | 300 | TT9-13 | 1525 | \$5,067.00 |
| Non-Adjustable* | 300 | TT9-13F | 1450 | \$4,172.00 |

* Specify selected height. Factory will preset height to bottom of deck. Base 1s 28" x 60". Outrigger spread is 69"

Casters: 8" with urethane elastomer tread. Two swivels with locks, two rigid. Ships in 3 pieces.

RECOMMENDED OPTION: Removable 30" Extension Railing \$254.00. **Finish:** Safety Orange, enamel paint. Lifts shipped at Freight Class 125. 500 lb counterweight shipped at freight class 50.

Electrical Note

(on all BL-MR-TT-HW products)
Our Standard electrical components are NEMA 1 or equivalent and are intended for indoor use in normal atmospheric conditions. If you need a special, please let us know.



Options - FD Series (at right)

| Option | Price |
|---|----------|
| Wheel brakes for swivel casters | \$ 50.00 |
| Detachable, rail-mounted tool tray 7"x24" | \$ 69.00 |
| Detachable, flourescent tube holder 10"x16"x42" | \$125.00 |

| Deck | Overall Height Above Forks | MODEL | Weight (lbs.) | PRICE |
|---------|----------------------------|---------|---------------|----------|
| 36"x36" | 60 | FD-U-C | 130 | \$555.75 |
| 48"x36" | 60 | FD-48-C | 180 | \$653.20 |

*User safety requires adequately rated forklift truck and secure attachment of work platform to truck.

NOTE: Deck is steel with abrasive mats.

Casters 4" rubber tread. Two swivels, two rigid.

Finish: Deep Gray enamel paint

